

DIAMANT PRO

TRADITIONAL ESPRESSO

DIAMANT PRO

Versions

- DIAMANT PRO 3GR 4B TA
- DIAMANT PRO 3GR TA
- DIAMANT PRO 2GR 3B TA
- DIAMANT PRO 2GR TA

Description



Diamant Pro 3GR 4B / Diamant Pro 3GR



Diamant Pro 2GR 3B / Diamant Pro 2GR

Smarter, stronger, better

Our beautifully crafted and yet strongest Espresso machine has been renovated to produce an unmatched espresso experience.

Thanks to the perfect balance between the state of the art technology and the finest espresso tradition, we have designed a second to none professional coffee machine which meets the highest barista standards together with the requirements of the very demanding coffee drinking market.



Main USP & Advanced features

- PID Control
- Multi boiler (PID) versions available
- Steam Levers with flush function
- SmartSteam (option)
- Smart Tea
- E-Cup warmer (option)
- Touchscreen main control & individual group OLED DISPLAYS
- Cleaning/maintenance warnings



CREM*Tech*
inside

Specifications



	Diamant Pro 3GR 4B	Diamant Pro 2GR 3B	Diamant Pro 3GR	Diamant Pro 2GR
Height, width, depth	535, 1090, 630 mm 21, 43, 25"	535, 885, 620 mm 21, 35, 25"	535, 1090, 630 mm 21, 43, 25"	535, 885, 620 mm 21, 35, 25"
Weight	112.5 Kg 24.8 lb	91.5 Kg 201.7 lb	100 Kg 220.5 lb	82 Kg 180.8 lb
Power ratings (Power ratings+OPTIONS)	380-415V 3N~ 6350W 50-60 Hz (O) Smart Steam: 380-415V 3N~ 6400W 50-60 Hz	220-240V 1N~ 3600W 50-60Hz (O) SmartSteam: 220-240V 1N~ 3620W 50-60Hz (O) 3Ph: 380-415V 3N~ 4800W 50-60Hz (O) SmartSteam + 3ph: 380-415V 3N~ 4850W 50-60Hz	380-415V 2N~ 4350W 50-60 Hz (O) SmartSteam: 380-415V 2N~ 4400W 50-60 Hz (O) 3Ph: 380-415V 3N~ 6350W 50-60 Hz (O) SmartSteam + 3ph: 380-415V 3N~ 6400W 50-60 Hz	220-240V 1N~ 3600W 50-60Hz (O) SmartSteam: 220-240V 1N~ 3620W 50-60Hz (O) 3Ph: 380-415V 3N~ 4800W 50-60Hz (O) SmartSteam + 3ph: 380-415V 3N~ 4850W 50-60Hz
Boiler(s) capacity	17.5 l + 3 x 1.5 l	11.5 l + 2 x 1.5 l	17.5 l	11.5 l
Operation pressure	0.8 to 1.2 bar	0.8 to 1.2 bar	0.8 to 1.2 bar	0.8 to 1.2 bar
Water connection	3/8" Internal thread	3/8" Internal thread	3/8" Internal thread	3/8" Internal thread
Steam wands+HW tap	2+1	2+1	2+1	2+1
Height group	TA	TA	TA	TA
Single+Double portafilter	1+3	1+2	1+3	1+2

Standard Features

- PID CONTROL
- Multiboiler (PID)
- TA (high group head)
- Volumetric dosing + group display
- Group flush button
- Main touch screen
- Auto hot water tap dose
- Lever taps
- Cool touch steam wands
- Smart Tea
- Built-in rotatory pump
- Soft pre infusion group chamber
- Adjustable electronic pre infusion
- 60 mm single pressure gauge
- Barista lights
- ECO mode
- Auto On/OFF
- Cleaning/maintenance warnings
- USB connection
- Matt black body colour


Supplied Accessories

- 55-cm inlet hose
- x3 Blindfilter
- Drain tube (150 cm)
- SmartSteam 1-hole nozzle*
- SmartSteam Multi-hole nozzle*

(*) For machines equipped with SmartSteam option only.

Options

- SmartSteam
- E-Cup warmer
- Black coated steam wands
- Branding/colour personalization (at POA)
- 3Ph for 2GR single & multi boilers version
- 3Ph for 3GR single boiler version

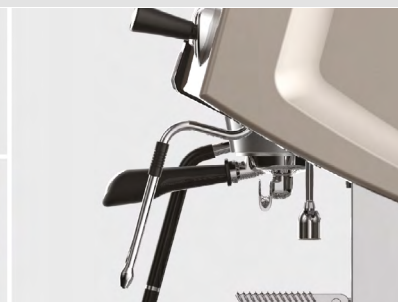

NOTE: Please check your regional price list for available versions/options and part numbers.

COMPLIANCE: CB

INSTALLATION NOTE: Please refer to the User Manual and the Technical Manual.

Welbilt reserves the right to make changes to the design or specifications without prior notice.